





HYWEIGH™ TRUCK SCALE

Full Pit

Concrete or Steel Deck

PermaCell™ • SERIES H40

Weight Management Is Our Business™

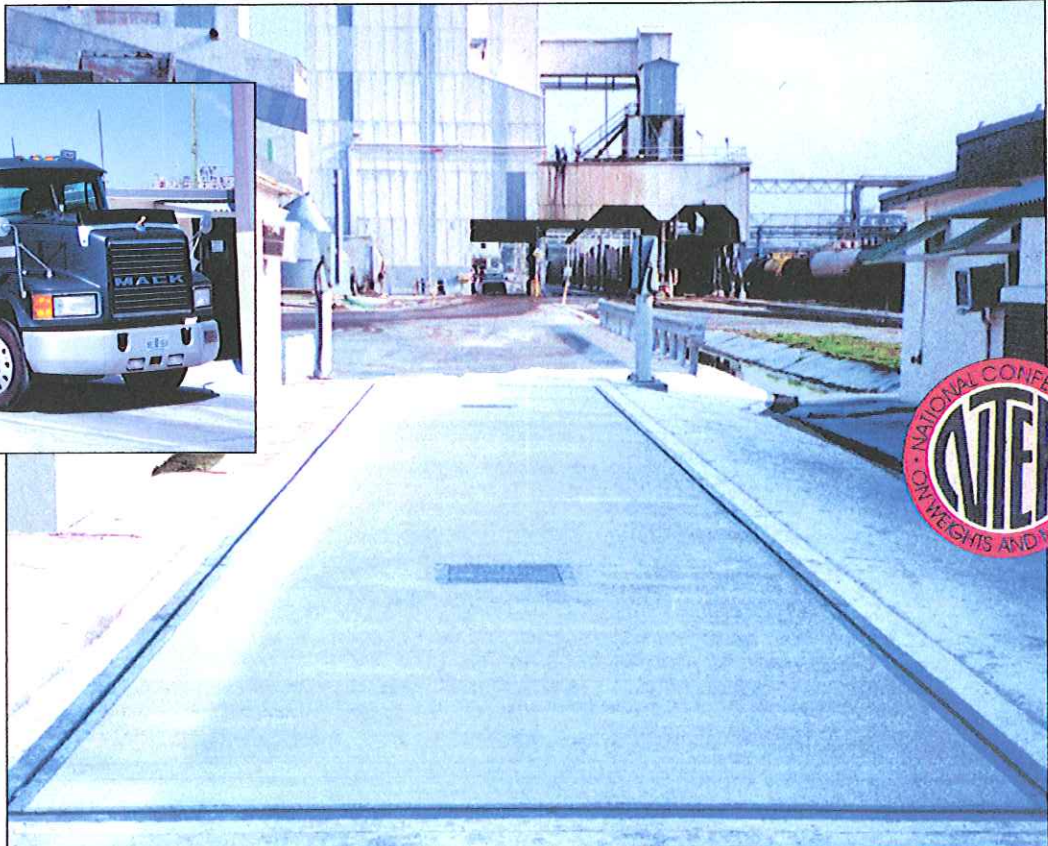

HYWEIGH™

A superior pit-type truck scale, designed for the most demanding applications. Engineered without electronic hardware beneath the weighbridge makes it the most reliable truck scale available.


The heart of the HYWEIGH™ is the PermaCell™, a load cell engineered for immunity to environmental factors that destroy electronic load cells.

- Immune to lightning damage
- Immune to water damage
- Immune to rodent damage
- Grade 304 stainless steel
- Immune to explosive potential
- Extended calibration integrity

Concrete deck shown



Series 136 PermaCell™ beneath the weighbridge.

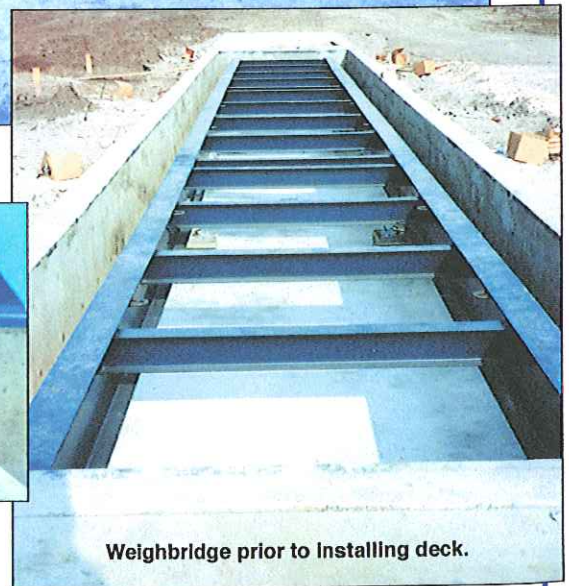

Weighbridge prior to installing deck.

**LIFETIME GUARANTEE AGAINST WATER AND LIGHTNING DAMAGE
ON ALL HYDROSTATIC LOAD CELLS**

BENEFITS & SPECIFICATIONS

Weighbridge

The HYWEIGH™ Series H40 weighbridge is constructed of massive, wide-flange main girders and cross-beams. The concrete deck is assembled on site, with corrugated sheeting and two mats of rebar to accept 6 inch or 8 inch deck concrete. The result is a weighbridge of great strength, long life and high reliability.

Outstanding Benefits of PermaCells™



PermaCell™ Model 136-75

- Totally non-electronic for maximum reliability.
- NTEP certified for accuracy and performance
- Guaranteed against failure from water, flooding, humidity, condensation, washdown and rodents
- PermaCells™ are impervious to RFI and EMI
- High capacity: 75,000 pounds each
- Free-floating column with self restoration design to absorb energy from truck motion on the scale
- Grade 304 stainless steel, welded construction
- High corrosion resistance
- Impervious to rodent damage (no cables)
- Totally safe for all explosive areas
- Extends calibration integrity

A Superior Scale – A Superior Warranty

The Series 136 PermaCell™ is guaranteed for life against failure caused by lightning and water. Additionally the PermaCell™ has a 10-year warranty against defects in material and workmanship.

Applications

- Waste Transfer • Aggregate / Quarries
- Grain • Lumber • Asphalt / Concrete
- Chemicals • Aerospace / Munitions
- Freight / Air Cargo • All Process Industries

HYWEIGH™ Standard Package

- Weighbridge – Heavy I-Beam construction
- Steel or Concrete deck
- PermaCells™ model 136-75
- Summing totalizer, lightning isolated
- Load cell base plates and anchor bolts
- Bumper assemblies
- Tubing, fittings, fluid, tools

Instrumentation

A wide variety of weight indicators, printers, traffic control and weight management software is available.

Options

- Weight indicators
- Heavy-duty deck
- Printers
- Weight management software
- Unattended weighing systems
- Remote weight displays
- Special paint finish
- Lightning isolation
- Pit / approach coping

Series H40 10', 11', 12' Widths

WEIGHBRIDGE LENGTH	CAPACITY TONS	CLC TONS	NO. OF MODULES	NO. OF CELLS	MODEL NUMBER
10	40	30	1	4	H42-4010
15	40	30	1	4	H42-4015
20	40	30	1	4	H42-4020
25	60	30	1	4	H42-4025
30	60	30	1	4	H42-4030
35	60	30	1	4	H42-4035
40	75	30	2	6	H43-7540
50	75	30	2	6	H43-7550
60	100	40	3	8	H44-10060
70	100	40	3	8	H44-10070
75	100	40	3	8	H44-10075
80	100	40	3	8	H44-10080
90	100	40	3	8	H44-10090
100	100	40	4	10	H45-100100
120	100	40	4	10	H45-100120
140	100	40	4	10	H45-100140

NEVER AGAIN REPLACE A LOAD CELL

Emery Winslow Scale Co.

73 Cogwheel Lane
Seymour, CT 06483
(203) 881-9333 Fax (203) 881-9477
www.emerywinslow.com • homeoffice@emerywinslow.com

4530 North 25th St.
Terre Haute, IN 47805
(812) 466-5265 Fax (812) 466-1046

YOUR REPRESENTATIVE IS: